



*The lightweight,
powerful,
space creating
gas and electric
heating solution for
the RV market*



Whale's highest electric setting - save money using high 3kW electric setting on site

- Suitable for caravans, motorhomes and camper vans
- Compact, space saving heating solution with narrow rotatable design
- Installed underfloor, maximising valuable living and storage space
- Enjoy the great outdoors all year round with total comfort day and night
- Versatile - choose to run on gas and electric for maximum output, or electric on site or gas when wild camping
- Easy to use, intuitive control panel

More for the manufacturer...



Less Weight
Compact and lightweight design



More Space
Increased bunk space, full length wardrobes and longer beds



Design Freedom
Customisable installation creating a blank canvas for vehicle designers



Connectivity
CI-BUS control compatibility



More Options
Wide range of models with efficient performance to maximise comfort

More for the user...



Fast heat up and fully automatic output modulation for enhanced user comfort



Quiet night time operation for when you need it most



Cosy van all year round



Even and well maintained heat distribution




Easy to use, no fuss controls

Technical Specifications
















		HEAT AIR 5 GTE	
Conformity	CE		0086/11
	ECE R122		E13 122R - 000174
	ECE R10		E11 10R-10791
	Ingress Protection		IP 45
Electric 230V AC	Heat In-/Output	[kW]	0.75, 1.50, 3.00
	Current Rating	[A]	3.3, 6.6, 13.0
	Rated Fuse Size	[A]	16
Gas	Type		Butane/Propane 30mbar - CAT I _{3B/P(30)}
	Heat Input	[kW]	1.5, 3.2, 4.7
	Heat Output	[kW]	1.4, 2.8, 4.1
	Consumption	[g/h]	109, 233, 342
Combined	Electric + Gas Output	[kW]	4.3
Electric 12V DC	Voltage	[V]	10.1 to 15.9
	Gas Current Draw Range	[A]	0.6 - 3.3
	Gas Current Draw Average	[A]	1.4
	Standby*	[A]	0.008
	Rated Fuse Size	[A]	10
Temperature	Storage	[°C]	-40 to +70
	Operation	[°C]	-20 to +50
	Control	[°C]	+5 to +32
Physical	Dimensions L x W x H	[mm]	559 x 165 x 175
	Weight	[kg]	8.7
	Max Air Flow @ 0.5mbar	[m ³ /h]	220
	Altitude Range**	[m]	0 - 2750


*Standby Current Draw for Heater only **Output of heater may be limited at higher altitude depending on ambient and operating conditions.

Whale Heat Control Panel



← 68.75mm →

-  Gas heating button
-  Gas heating standby
-  Gas heating on
-  External control standby
-  External control active
-  Adjust temperature
-  Night time setting (approx 16°C)
-  Frost setting (approx 5°C)
-  Lock out indicator
-  Reset button
-  Electric heating button
-  Electric heating standby
-  0.75kW electric
-  1.50kW electric
-  3.00kW electric

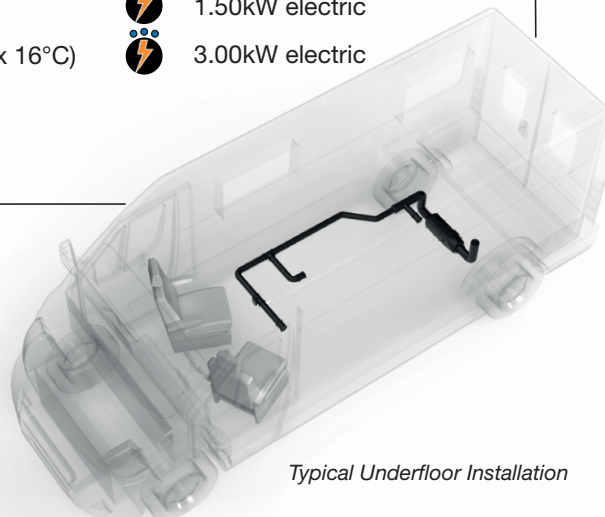

Typical Underfloor Installation

- LIN protocol
- CI-BUS control compatibility
- Easy to use, intuitive design
- Low profile & compact
- Modern capacitive touch technology
- Discrete LED auto dim
- High quality UV resistant polymer

Whale Support

Tel: 0345 9090 911 Support@whalevanlife.com www.whalevanlife.com



©Copyright Whale 2021 - All rights reserved. Reproduction in whole or in part without permission is prohibited.

WHALE® is a registered trademark of Munster Simms Engineering Limited, Bangor, Northern Ireland trading as Whale. Whale's policy is one of continuous improvement and we reserve the right to change specifications without prior notice. Illustrations are for guidance purposes only.

Neither the accuracy nor completeness of the information contained in this or any product literature is guaranteed by the Company and may be subject to change at its sole discretion.